


Spring Washer (Steel)

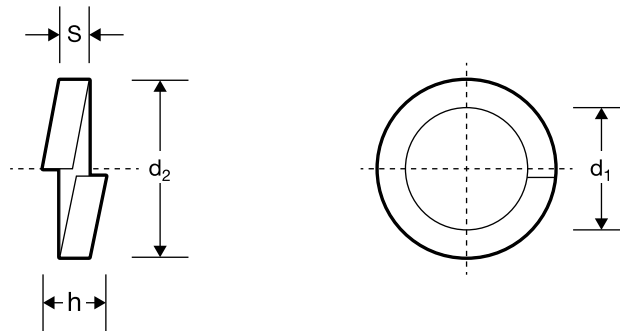

Specification: BS 4464:1969 Type B

Finish / Coating: Hot Dip Galvanized to BS EN ISO 1461:2009

Zinc Plated to ISO 4042:1999

Black Finish

Items No:

626

627

628

H.D.G. Spring Washer

Ordering Example

Item No

6 2 6

Diameter

0 1 6

Length

0 0 0 0

d (diameter)	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24	M27	M30	(M33)	M36	(M39)	M42	(M45)
d1 (inside diameter) / mm	6.1 6.4	8.2 8.55	10.2 10.6	12.2 12.6	14.2 14.7	16.3 16.9	18.3 19.0	20.3 21.1	22.4 23.3	24.4 25.3	27.5 28.5	30.5 31.5	33.5 34.6	36.5 37.6	39.6 40.8	42.6 43.8	45.6 46.8
d2 (max.) (outside diameter) / mm	6.1 11.7	8.2 14.85	10.2 18.0	12.2 21.0	14.2 24.1	16.3 27.3	18.3 29.4	20.3 33.5	22.4 35.7	24.4 39.8	27.5 43.0	30.5 48.0	33.5 55.1	36.5 58.1	39.6 61.3	42.6 68.3	45.6 71.3
s (Thickness) / mm (h=2s ±15%)	1.6± 0.1	2± 0.1	2.2± 0.15	2.5± 0.15	3± 0.15	3.5± 0.2	3.5± 0.2	4± 0.2	4± 0.2	5± 0.2	5± 0.2	6± 0.25	6± 0.25	6± 0.25	6± 0.25	7± 0.25	7± 0.25